

FOR NOTES

LEVEL

TONE

ATTACK

SUSTAIN

LEVEL

TONE

ATTACK

SUSTAIN

LEVEL

TONE

ATTACK

SUSTAIN

YERASOV MUSIC CORPORATION

www.yerasov.ru e-mail: sale@yerasov.ru

BASS

COMPRESSOR

BF-10B

Guitar pedal

User manual

YERASOV.

SPECIFICATIONS

Power supply (battery or power adapter), V.....	9
Current Draw, mA.....	15
Dimensions, mm:.....	112x62x50
Weight, kg.....	0.25
PACKAGE CONTENTS	
Guitar pedal BF-10B, pcs.....	1
User Manual, pcs.....	1
Packagings packing, pcs.....	1

PRECAUTIONS

- Avoid storing or operating the unit in humid conditions (not above 80%).
- After storage or transportation at a low temperature before turning on unit shall be stored at room temperature for at least 2 hours.
- Protect the device from falls, bumps, to get into foreign objects, liquids, dirt and rain.

GENERAL INFORMATION

Pedal BASS COMPRESSOR BF-10B is a bass guitar compressor-sustainer. It balances the sound of the instrument weakening signal with a higher level, and strengthens the weak vibration of the strings, while maintaining the naturalness of the sound. BF-10B highlights the style and individuality of the performer, giving special dynamic coloring sound. Pedal has a 4 control knob: **SUSTAIN, ATTACK, TONE** and **LEVEL**. By changing the settings you can achieve the sound corresponding to the style and character of game.

BF-10B assembled on the modern element base. The application of one of the best managed amplifiers 2181 Corporation THAT has allowed to receive excellent dynamic and noise characteristics. In the audio path used film capacitors. Application of high-quality electronic components ensures reliable operation of the product.

The pedal is applied foot switch ALPHA real TRUE BYPASS.

1


USE OF PRODUCT

The power of guitar pedals BF-10B : a battery of type 6F-22, which is installed under the bottom cover pedal, or from an external source of stabilized voltage 9V.

In order to avoid the background, use only adapters AD9-100 or AD9-400 firms YERASOV.


Turn on the power from the battery when joining plug type Jack (mono) input Jack, so for extended battery life, do not leave the Jack in the input connector, if you are not using the device.

- Connect the AC adapter to the Jack or install the battery.
- Connect the pedal according to the picture. Connect the output of the pedal to the entrance combo-amplifier.
- Turn on the combo-amplifier.
- For the effective operation of the product, set the control of the output signal of Your guitar at maximum.
- When you turn on the pedal led indicator illuminates.

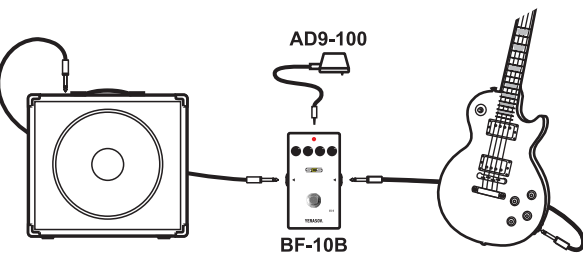


3

PANEL DESCRIPTION

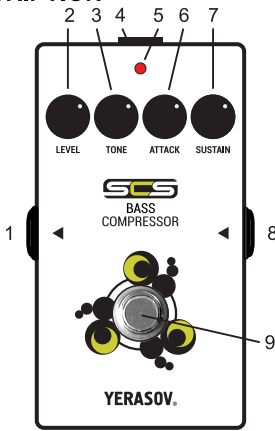

- 1 - output Jack
- 2 - **LEVEL**- regulator of output signal level
- 3 - **TONE**-tone controls
- 4 - Jack for DC adapter
- 5 - on LED effect
- 6 - **ATTACK** - attack sound knob
- 7 - **SUSTAIN** - the regulator degree of compression (duration of the sound)
- 8 - Input Jack
- 9 - on / off button effect

CONNECTION POLARITY OF DC ADAPTER



2

- Set the desired volume **LEVEL** regulator. With the help of the controller **SUSTAIN** achieve the desired lengthening of sound corresponding to the style and character of the game. When installing the controller **SUSTAIN** in the leftmost position of the pedal works as limiter. Regulator **ATTACK** adjust the attack at the time of plucked strings. For detailed sound control pedal is supplied with a regulator voice **TONE**. When installing the handle **TONE** in the mean position of the sound close to the original .

USE THE PEDAL WITH SCS PEDAL BOARD

The pedal is compatible with SCS Pedal Board. Connector for SCS is located on the bottom cover of the pedal body. Connect the pedal to the Pedal Board is a special cable that comes with the SCS Pedal Board. For more detailed instructions, please visit to site [www.yerasov.ru](http://www.yerasov.ru).

REPLACEMENT BATTERY

The battery compartment is located underneath the pedal cover. To replace the battery, remove the cover by unscrewing the 4 screws. Replace the battery and replace the cover.

4